


MMC INTERNATIONAL CORP



FLEXI-DIP



PORTABLE RESTRICTED TRIMODE

UTI OIL-WATER
INTERFACE
GAUGING TAPES

- *Restricted ("R" type)
- *Gauging
- *Restricted gauging via
our tank-top gauging stations
and vapor control valves



Serving You Around The World

MMC RST 1223

PORTABLE GAUGING TAPE



Each instrument is designed for speed and simplicity of operation. A single dip of each tank will provide, with great accuracy, all the information you are seeking. When the electronic probe senses hydrocarbon, a steady tone is heard; when sensing oil/water interface it emits an intermittent tone. Temperature is shown on an LCD display in the hub. A sturdy carrying case (below) with a molded interior provides convenient transport and safe storage for the unit. All MMC Flexi-Dip gauges are made in America. That, plus MMC's 60 years of service to the maritime and petroleum industries is your best assurance that you're getting the finest gauging instruments available today. Also included: spare battery, instruction manual and alligator clip grounding cable.

Codes - Restricted and Open Gauging Tapes

CHEMICAL TRIMODE - 2401S (UTI)
TRIMODE - 2401T (UTI)

2401T R 050 F BS B

GAUGING FORMAT: R-RESTRICTED. F-OPEN

LENGTH	ENGLISH	METRIC
50ft or 15m	050	15m
65ft or 20m	065	25m
75ft or 25m	075	25m
100ft or 30m	100	30m
40m		40m

TEMPERATURE FORMAT: F-FAHRENHEIT, C-CELSIUS

APPROVAL
BS - BASEEFA

BARREL TYPES FOR MMC VAPOR CONTROL VALVES

*B - "B" VCV
**MB - "MICRO-B" VCV
***C50 - "C50 & "F50" VCV FROM MMC ASIA
TS-"TS-C2" or "TS-A2" for HERMETIC VCV
TT-TANKTECH "YVC-02" VCV

SPECIFICATIONS

ACCURACY: Tape: $\pm 1/8"$ ($\pm 2\text{mm}$), $\pm 0.01\%$ of F.S. tape length
Digital Display: (Temperature) $\pm 0.5^\circ\text{F}$ ($\pm 0.2^\circ\text{C}$) ± 1 digit
Probe: For dryness to within $3/8"$ (10mm) of tank bottom

APPLICATION: F - Open gauging (Safe product vapors only)
R - Restricted gauging via MMC vapor control valve

APPROVAL: Intrinsically safe: BASEEFA

OPERATION: UTI - Ullage, Temperature, Interface

AMBIENT TEMPERATURE LIMITS:


Liquid Crystal Display: -40°F (-40°C) to 176°F (80°C)

TAPE LENGTHS: Single sided

50ft, 65ft, 75ft, 100ft
15m, 20m, 25m, 30m, 40m
Single sided - (special)
100ft engineering scale (ft, 1/10ft, 1/100ft)

TYPICAL WEIGHTS:

5ft (15m) - "R" 8lb (3.6kg) "F" 7lb (3.2kg)
100ft (30m) - "R" 9lb (4.1kg) "F" 8lb (3.6kg)

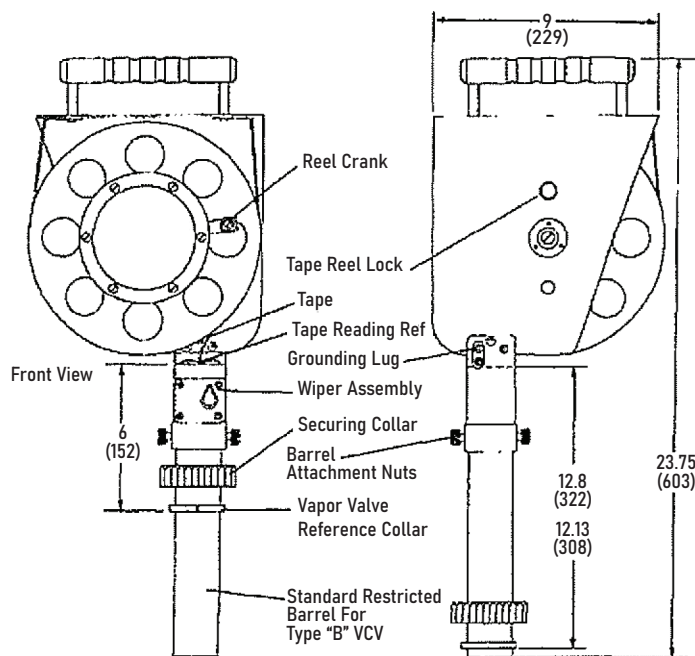

VCV Barrels are available to fit all valves listed above.
Please identify when ordering.