




1AL Aluminium Cylinders


Calgaz offers two aerosol type gas cylinders used where the quantity of gas required is small.

The 1ALE is supplied with a screw type valve and requires a regulator from the FF20 range to be fitted to regulate flow and replaces the 12DA cylinder. This product is approved globally.

The 1ALU is supplied with a plastic trigger mechanism allowing an unregulated flow of gas to be released and replaces the 1AL cylinder. This product is approved globally.

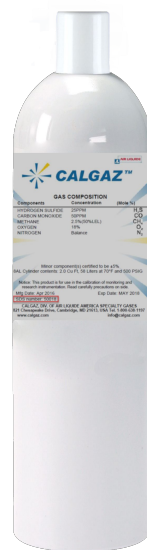

1ALE

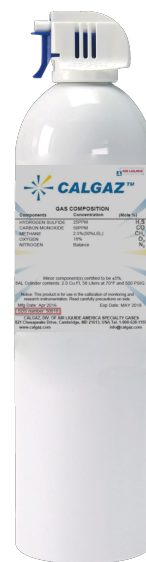

1ALU

Characteristic				
	Contents	Service Pressure	Dimensions	Weight
1ALE (Replaces the 12DA)	11 liters*	11 bar* (160 psi)	285 mm x 74 mm (11.2"x2.9")	0.14 kg (0.31 lb)
1ALU (Replaces the 1AL)	11 liters*	11 bar* (160 psi)	292 mm x 74 mm (11.5"x2.9")	0.14 kg (0.31 lb)

*@25 Deg C - Filling tolerance +0/-10%

Specifications				
	Approvals	Type	Cylinder Valve	Recommended Equipment
1ALE	Global	Non-Refillable	Screw Thread	FF20 Series Regulators
1ALU	Global	Non-Refillable	Trigger Aerosol	None

Distribute by: