

CLOSED GAUGING TAPE

**ITS GAS-TIGHT
CONSTRUCTION MEETS
ENVIRONMENTAL AND
SAFETY CODES.**



**Triple-function
portable
gauging tape.**



**Closed tape is
shown connected
to MMC "MB"
valve**



CLOSED GAUGING TAPE

The Closed Flexi-Dip™ (measuring tape) is battery-operate intrinsically safe. When installed in a vapor control valve on a storage (cargo) tank, it forms a tightly sealed system that prevents toxic vapors from escaping and constitutes a closed gauging system for that tank. The tape is marked in Metric or English units and is anti-static coated (as is the sensor). The tape is appropriately marked to show tape direction and motion easily, and to ensure the full rewind position. A coiled grounding cable with large alligator clip is supplied as standard. This Closed system is recognized by many worldwide regulatory bodies as equivalent to a fixed gauging system if the tape remains in the valve for the duration of the cargo handling operation.

SPECIFICATIONS

ACCURACY OF TAPE READING:

Fluid level +/- 1/8 inch (2 mm)

BATTERY:

9 Volt Duracell

AMBIENT TEMPERATURE LIMITS:

-20°F (-29°C) to 120°F (49°C)

PRODUCT TEMPERATURE LIMITS:

-40°F (-40°C) to 180°F (82°C)

TAPE LENGTHS:

50ft. (15m), 65 ft. (20m), 75 ft. (25m),
100 ft. (30m), 35m

TYPICAL WEIGHTS:

14 lbs. (6.4 kg)

PRESSURE LIMITS:

3 psi working, 7.5 psi maximum


APPROVALS:

Intrinsically safe; BASEEFA

PRODUCT CODE: 2401TC050FBS B

**2401T - Trimode
C (Closed)
50 ft. (15m), 65 ft. (20m), 75 ft. (25m),
100 ft. (30m), (35m)
F (Fahrenheit), C (Celsius)
Approvals - BS (BASEEFA),
Barrels - B (Standard Valves) B, UB
MB (Micro-B Valve)
F50 - MMC(A) F50 & C50
TS - Hermetic 2" Valve [C.2-SS]

Chemical Trimode available - 2401SC

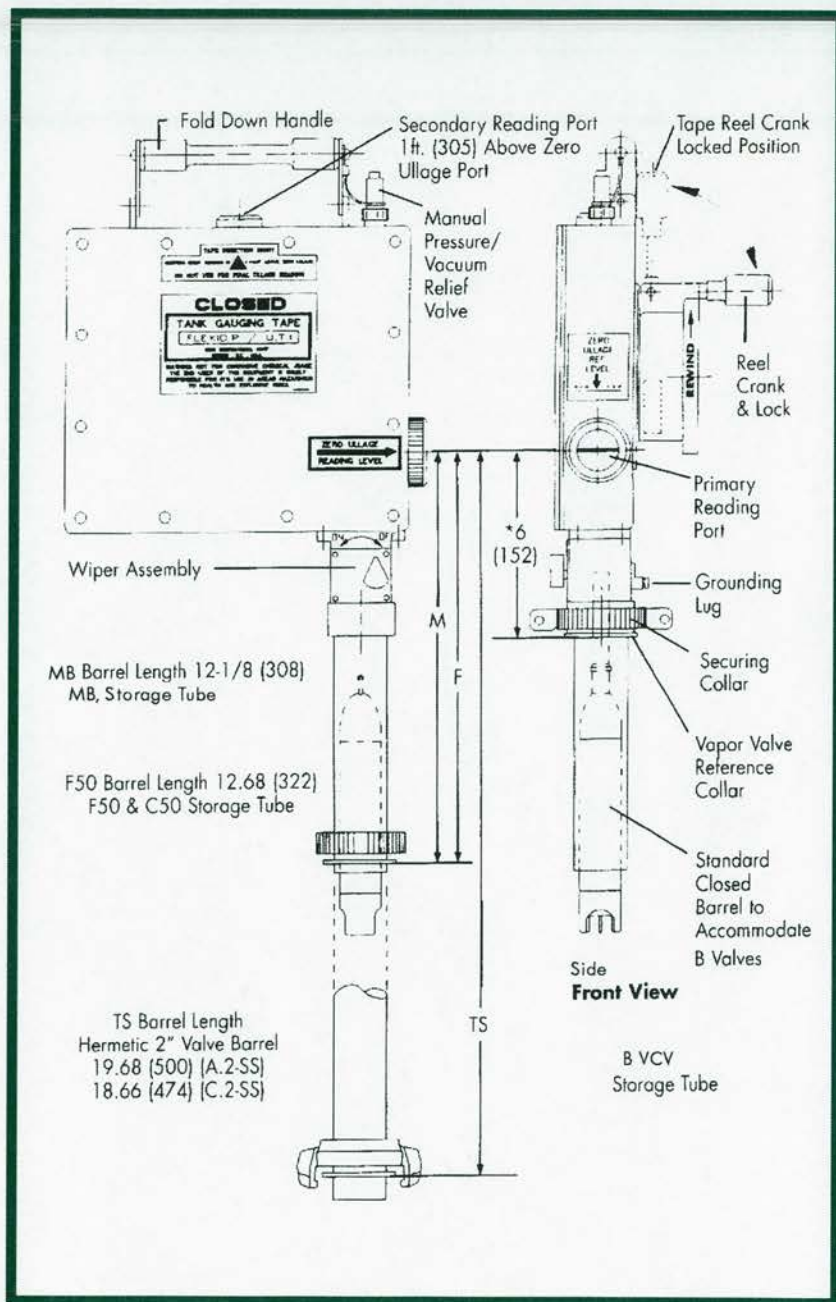

WEB: <http://www.mmcintl.com>
E-MAIL: mmcinwd@aol.com

MMC International Corp.

60 Inip Drive
Inwood, NY 11096-0664 U.S.A.
Phone: 1-800-645-7339
1-516-239-7339
Fax: 1-516-371-3134
E-mail: info@mmcintl.com

MMC (Europe) Ltd.

South Nelson Road
South Nelson Industrial Estate
Cramlington
Northumberland NE23 9WF UK
Phone: (01670) 738111
Fax: (01670) 738789
E-mail: info@mmc-europe.co.uk

MMC (Asia) Ltd.

7-7, 2-Chome, Kotonoo-Cho
Chuo-ku, Kobe 651
Japan
Phone: (078) 251-0061
E-mail: info@mmcasia.co.jp