

TO2-233 PPM Oxygen Sensor

Product Specification Sheet

Electrochemical Galvanic Fuel Cell Trace Oxygen Sensor




Measures Oxygen From 0.01 PPM to 25.0%
Electrochemical Fuel Cell Sensor Technology
Self-Contained, No Need To Add Electrolyte
Excellent Stability, Performance & Linearity
H2S Up To 10 PPM For Full Sensor Life


Specifications:

Sensor Technology	Micro Fuel Cell
Signal Output1	530 - 1050 uA
Measuring Range	0 - 1 PPM (Min) 0 - 10000 PPM (Max)
Response Time T90	7 Seconds
Accuracy Full Scale2	± 1% of Signal
Repeatability F.S.	± 0.5%
Temp Coefficient	2.54 % / ° C
Operating Temp	0 to 50 ° C
Storage Temp	0 to 45 ° C
Recommended Flow	0.5 - 5 SCFH
Humidity	0 - 100% RH (Non - Condensing)
Expected Life3	24 Months
Storage	3 Months
Warranty4	12 Months
PCB Connection	Center Foil Negative Outer Foil Positive

For Use In CO2 & Natural Gas Applications

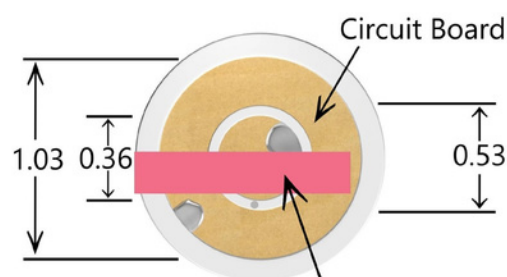

REMOVE RED SHORTING FLAG PRIOR TO USE.

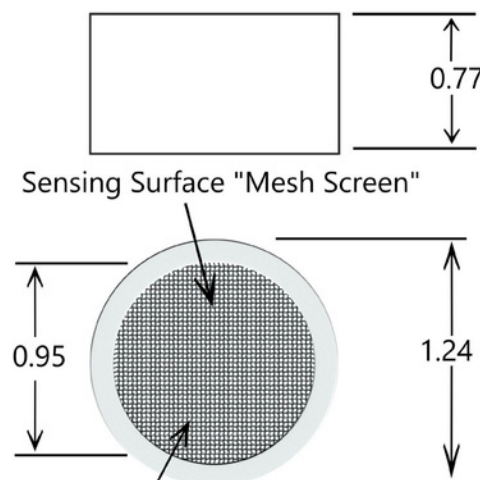

For optimum operation, Mesh Screen should be facing down or sideways.

1. Signal Output is measured in air at 25 ° C, Sea Level.
2. Full Scale Accuracy is calculated with constant pressure, temperature, and proper calibration (80% O2 Value on Full Scale Range or a range higher). Drastic Temperature change can result in a maximum error of ± 10%.
3. Expected life is calculated when O2 < 1000 ppm @ 25 ° C, Sea Level.
4. Southland Sensing Ltd. warrants the sensors for the period noted above to be free from defects in materials and workmanship. SSO2 will not be held liable for sensors damaged due to customer neglect.
4. Southland Sensing Ltd. sensors are tested and validated to BSI Standard BS EN 50104:2010